

Technical Data Sheet

NOBEL THINNERS A820 S (SLOW THINNER)

Product description

NOBEL Thinners are especially designed to suite the application viscosity and the drying time of NOBEL Car Refinish products when used with NOBEL Hardeners. NOBEL Thinners optimize all painting conditions and assist in delivering highly reliable application processes.


USES

Universal thinner for TPA products, 2K Acrylic Fillers, 2K Sealers, 2K Acrylic Paints, Basecoats and Clearcoats.

It adjusts the application viscosity at temperature above 30°C.

TECHNICAL DATA

Thinner	A800F
Appearance	Transparent
Clarity	Clean & Clear, Colorless
Color, APHA	Max. 10 APHA
Viscosity at 25 °C (Cup Ford No.4)	10 ± 2 Second
Specific gravity at 20 °C	0.87 ± 0.02
Distillation Range	120 – 150 °C
Water Content	Max. 0.05 %
15°C – 20°C	Suitable
20°C- 25°C	Suitable
Above 30°C	Suitable
Above 30°C	Suitable

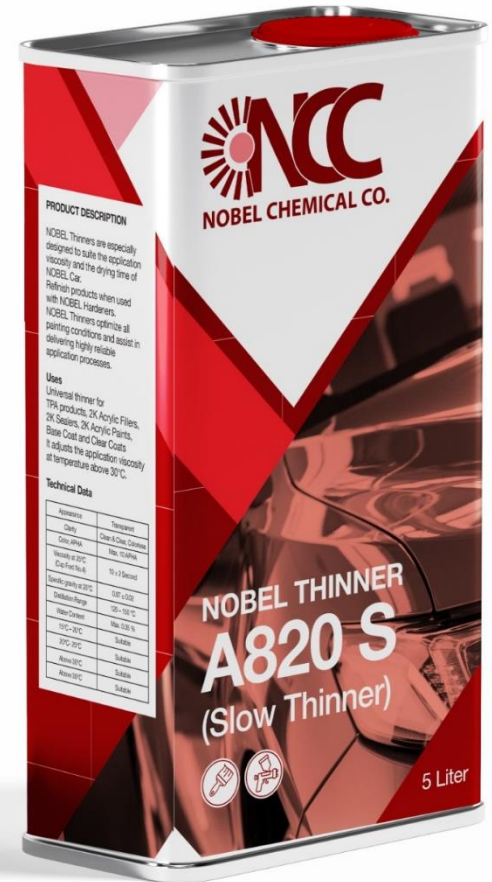

PACKING

- For more information, please refer to the company's price list or the nearest agent.

STORAGE AND SHELF LIFE

- 5 years in the original package, tightly closed at a temperature of 25 ° C and away from direct sunlight and heat

REMARKS

- Material has to be at room temperature (20-25°C) before use.
- These products contain hazardous materials and therefore appropriate personal protective equipment should always be used.

